


FTKF18AXVJU / FTKF24AXVJU/FTXF18AXVJU / FTXF24AXVJU

Sticking method
(Detail A)

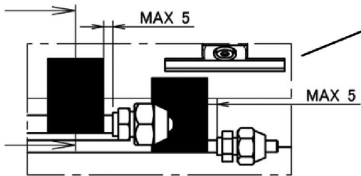


DETAIL A


THE REST OF SEALING MATERIAL (PIPING) IS STICK TOGETHER.

DIRECTION OF THE BONDING PART CAN BE ANY DIRECTION.

SEALING MATERIAL IS STICK ON THE PIPING.



X Remark:
ANY DAMAGE ON THE SEALING MATERIAL (PIPING) IS NOT ALLOWED.
MAXIMUM MISALIGNMENT FOR SEALING MATERIAL (PIPING) IS 3mm.

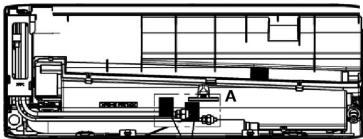

NOTE:
ITEM (24) APPLICABLE FOR R32 MODELS

